

File

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER U-R-7-6

Relating to Certification of New Heavy-Duty Off-Road Equipment Engines

DETROIT DIESEL CORPORATION

Pursuant to the authority vested in the Air Resources Board by Sections 43000.5, 43013 and 43018 of the Health and Safety Code; and

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following Detroit Diesel Corporation 1996 model-year engine, with rated power between 175 and 750 horsepower, and exhaust emission control systems are certified as described below for use in heavy-duty off-road equipment:

Typical Equipment Usage: Industrial / Construction Equipment

Fuel Type: Diesel

<u>Engine Family</u>	<u>Liters (Cubic Inches)</u>	<u>Exhaust Emission Control Systems and Special Features</u>
TDD5.2TG4ARE (6V-53TA)	5.2 (318)	Turbocharger Charge Air Cooler Smoke Puff Limiter

Engine models and codes are listed on attachments. Production engines shall be in all material respects the same as those for which certification is granted.

The total hydrocarbons (THC), carbon monoxide (CO), nitrogen oxides (NOx), and particulate matters (PM) certification exhaust emission standards, in grams per brake horsepower-hour (g/bhp-hr), and the opacity of smoke emission standards, in percent (%), during acceleration (Accel), lugging (Lug), and peak (Peak) modes, for this engine family are (Title 13, California Code of Regulations, Section 2423):

<u>Exhaust Emissions (g/bhp-hr)</u>				<u>Smoke Opacity (%)</u>		
<u>THC</u>	<u>CO</u>	<u>NOx</u>	<u>PM</u>	<u>Accel</u>	<u>Lug</u>	<u>Peak</u>
1.0	8.5	6.9	0.4	20	15	50

The THC, CO, NOx and PM exhaust emission certification values, in g/bhp-hr, and the opacity of smoke emission certification values, in percent (%), for this engine family are:

<u>Engine Family</u>	<u>Exhaust Emission (g/bhp-hr)</u>				<u>Smoke Opacity (%)</u>		
	<u>THC</u>	<u>CO</u>	<u>NOx</u>	<u>PM</u>	<u>Accel</u>	<u>Lug</u>	<u>Peak</u>
TDD5.2TG4ARE (6V-53TA)	0.8	1.3	6.3	0.3	13	4	19

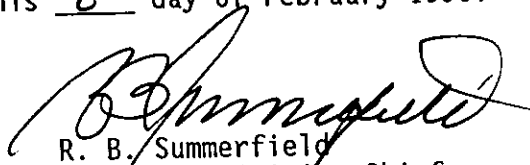
BE IT FURTHER RESOLVED: That the listed engine models comply with the "Exhaust Emission Standards and Test Procedures--Heavy-Duty Off-Road Diesel Cycle Engines" (Title 13, California Code of Regulations, Section 2423) for the aforementioned model year.

BE IT FURTHER RESOLVED: That the listed engine models also comply with the "Emission Control Labels--1996 and Later Heavy-Duty Off-Road Diesel Cycle Engines" (Title 13, California Code of Regulations, Section 2424) for the aforementioned model year.

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2425 et seq.).

Engines certified under this Executive Order must conform to all applicable California emission regulations.

Executed at El Monte, California this 8th day of February 1996.


R. B. Summerfield
Assistant Division Chief
Mobile Source Division

17-TDD5.2TG4ARE-11

E.O. No. A-290-U-R-7-6

Page 1 of 2

**1996 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
HEAVY-DUTY DIESEL-STANDARD ENGINES**

Manufacturer: Detroit Diesel Corporation

Engine Family: TDD5.2TG4ARE

Displacement: / 5.2 Liters / 318 Cubic InchesAll Engine Codes in Family: CA 49S 50S X; Strokes/Cycle: 2; Valves/Cylinder: 4Ignition: Compression X; Compression with Glow Plug ; Spark Fuel Type(s): Dedicated X; Flex Fuel ; Dual-Fuel ; Diesel X; M100 ; M85 CNG/LNG ; LPG ; Other (Specify) Diesel Cert Fuel: 13CCR 2282 ; 40 CFR 86.1313-90 ; 40 CFR 86.1313-94 XMaximum Rated Power: 242 HP @ 2800 RPMEngine Configuration: V-6Exhaust ECS: EM.SPL.CAC.(TC) // Primary Usage: Industrial / Construction Equip.

Engine Model (Eng Code)	Rated HP @ RPM	Fuel Rate @ Rated HP mm3/Stroke (Lbs/Hr)	Fuel Pump & Injector Part No.	ECM/PCM Part No.	EGR Valve Part No.	PTOX/ Catalytic Converter Part No.
<u>6V-53TA</u> (A242)	242 @ 2800	50.2 (93.5)	<u>600.3891*</u>			
(A240)	240 @ 2500	52.8 (87.8)	<u>600.3891*</u>			
(A223)	223 @ 2200	54.2 (79.3)	<u>600.3891*</u>			
* Indicate preproduction part number. Production part number will be added as soon as available.						